


## Floor frame 46 inch

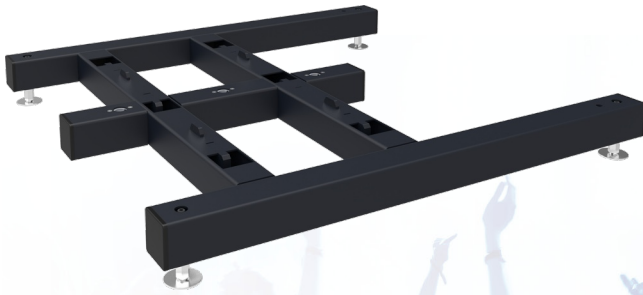

### 082.5110 Smart Rental Frame - Floor frame 46 inch incl. adjustable feet

The floor construction can be used in two ways: Legs to the front side to place the VideoWall as close to the wall as possible. Legs towards the backside to hide them. Floor correction: adjustable feet are integrated in the floor frames to level the base for your VideoWall. With wall installation, the bracket frames fitted with a screen specific bracket, are screwed to the wall. Through special draw latches they are fastened to neighbouring frames. When installing on the floor the floor frames are levelled on their location, coupling frames are fastened to these frames with camlocks, after which the bracket frames incl. screen specific brackets are connected with draw latches. When planning to fly the VideoWall in the truss, the floor frames are replaced by stabilizer frames and at the top of the coupling and bracket frames special fly sets are attached. These fly sets include a dept adjustment to level the VideoWall in the truss. The screen specific brackets include four keyholes in which the display (fitted with 4 coupling bolts) is hung. These innovations result in an impressive VideoWall which is now even easier and more precise to install then before.

## Floor frame 46 inch

### Features

**Weight:** 8.20 kg

**Colour:** Black

**Screen position:** Landscape, Portrait

**Inch range:** 46 inch (Seamless)

**Mobile / fixed:** Fixed

