



1 Mount housing bottom-part

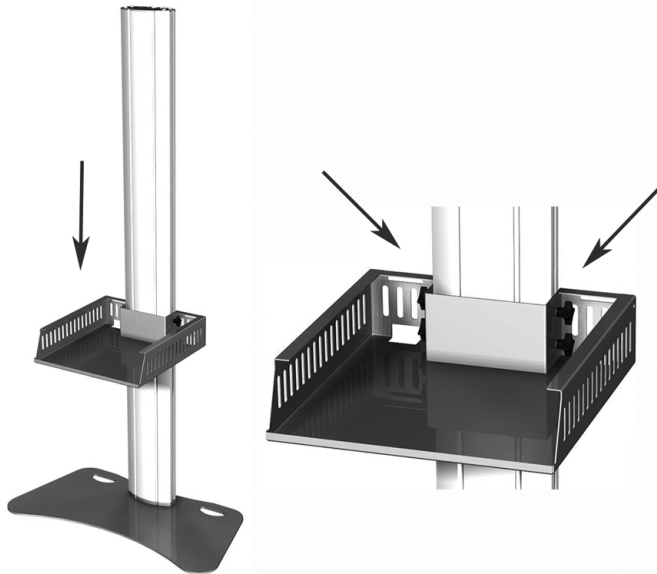


After a mounting bar is placed in both T-ducts on the sides, one can shove the bottom-part of the media housing over the column. When the required height has been reached, tighten the 4 knobs to fix its position.

2 Connect media player

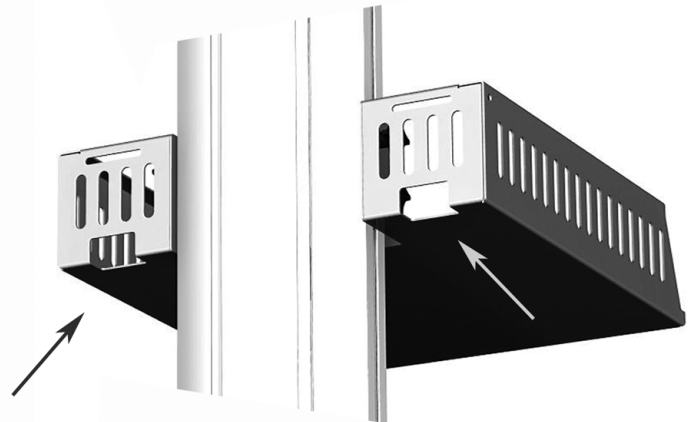


Place the media player as far as possible to the front of the media housing, this makes sure the air cooling can function optimally. Use the two slits at the back (see picture) to run the cables through.

3 Position lid

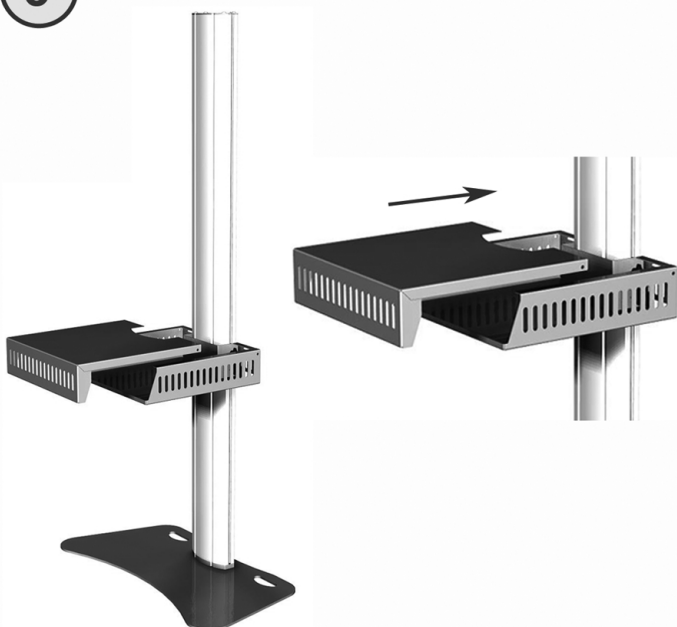

Shove the lid from the front carefully over the lower part of the housing to its utmost position.

4 Lock media housing (optional)

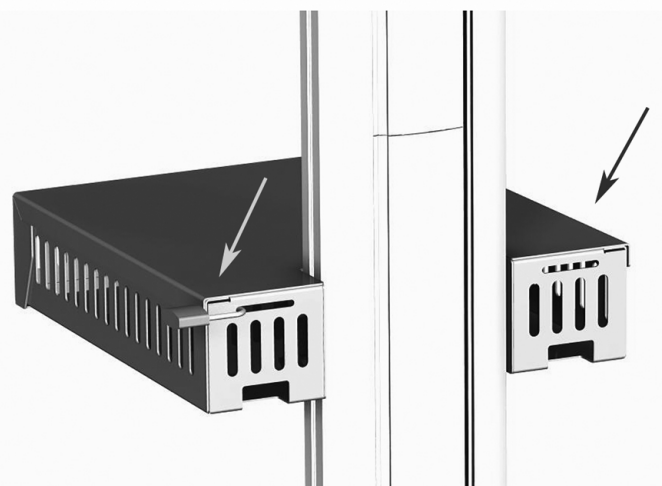

The media housing can be locked by means of an optional pad lock. This lock is run through the horizontal slit at the back, after which this lock is run through the sides of the bottom-, and top-part of the housing. One can choose whether to place a pad lock on the left and/or right side of the media housing.